

CHANGSHA TAIHE ELECTRONIC EQUIPMENT CO.,LTD.

Pressure Sensor | Temperature Sensor | Liquid Level Sensor | Load Cell | Smart Instruments

Position sensor | Torque | Internet of Things





16

Years of experience in sensor R&D,
manufacturing and production

Provide one-stop customization services
for various sensors

PPM-HLV-2

Oil Viscosity and Density Sensor

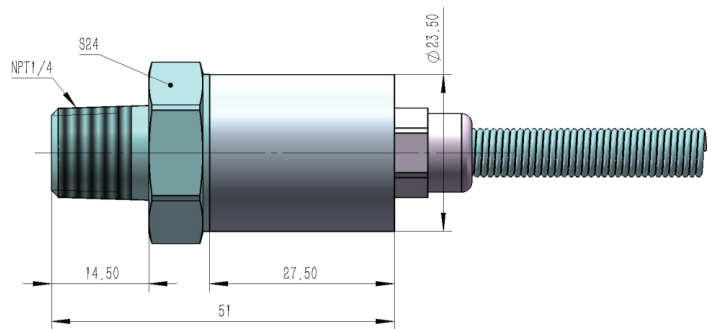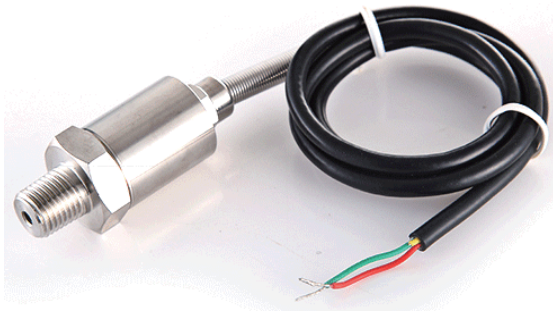

Product Introduction


PPM-T6103A pressure transmitter, with the composition micro fused pressure sensor and high precision digital integrated circuit, can accurate measurements and for a long period of time -196degrees liquid and quickly provide output signal. This type of pressure transmitter through a dedicated circuit module, filtering and noise suppression, and provides temperature compensation, make the product has unique hydrogen and hydrogen brittleness can resistance, high temperature resistance, resistance to overload, anti-jamming, long life, high cost performance, etc. Typical application: LNG and CNG pressure measuring, Gas control system, Liquefied petroleum gas fuel vehicle and liquefied gas carrier pressure monitoring and measurement.

PPM-T6103A pressure transmitter pressure seat adopts 17-4PH stainless steel single integral structure processing, The integration of the stainless steel diaphragm to overload performance is much higher than diffusion silicon, ceramic, etc, and pressure interface no welds, no oil or other organic matter, sealed performance is good. Sensor sensitive device adopts glass melting technology solid sintering on pressure seat, the sensor of high temperature resistant, shock resistant performance significantly increase, Ensure the sensor in harsh industrial environments, long-term stability and reliability, durable. In the standard purification production process, the parameters are strictly controlled, the entire product components, semi-finished and finished products after the strict test and screening of ageing, stable and reliable performance.

Features

- ◆ LNG Pressure Measurement
- ◆ Micro-fused Technology Pressure Transmitter
- ◆ All Metal Sealing, No Leakage Risk
- ◆ Superior Performance at Low Temperature
- ◆ Explosion-proof Circuit Design
- ◆ Overload Ability Strong
- ◆ Vibration Resistance Strong

Output Options

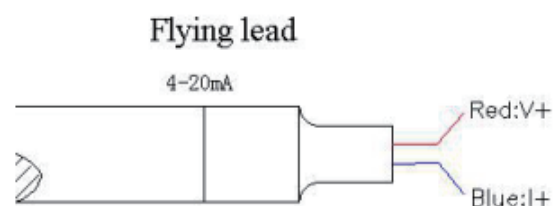

Specification

Supply Voltage	5VDC or 9~30VDC
Ambient Temperature	25°C
Accuracy	±0.25%Span
Comprehensive Accuracy	±1%FS
Long Term Stability	±0.25%Span
Maximum Resistance Between Transducer & Body (250Vdc)	50MΩ
Pressure Overload	3×Rated
Burst Pressure	5×Rated
Pressure Cycles	10Million
Compensated Temperature	-20~85°C
Operating Temperature	-40~125°C
Storage Temperature	-40~125°C
Vibration	±20g
Shock (11mS)	100g

Ordering Information

The selection code of the example is as follows:

MODEL	[0-X]	M	D	C4	B11	V6	G
PPM-T6103A	Pressure range	Units	Output	Pressure Port	Connection	Power Supply	Type
	[0-X]	P=Pa K=Kpa M=Mpa B=Bar S=Psi	E=4-20mA	C11=NPT1/4	B2=Cable-outlet	V1=24Vdc	G=gage

Example: PPM-T6103A-[0-4]MEC11B2V1G(PPM-T6103A Pressure Sensor, Range:0-4MPa, Output:4-20mA, Pressure Port:NPT1/4,Connection:Cable-outlet,Power Supply:24Vdc,gage)

CONTACT US

www.cspmsensor.com

Address: No. 188, Huanbao Road, Yuhua Zone, Changsha, Hunan, China

E-mail: info@cspmm.com

Mobile | Wechat | WhatsApp: +86 19118913383